Christopher Farr | cloth

Ripple Technical Sheet



Ripple Denim Linen

Composition	omposition 100% Linen			
Width	51.2" / 130 CM			
Pattern Repeat	Horizontal Repeat 3" / 7.7 CM Vertical Repeat 4.6" / 11.8 CM (Straight			
	Match)			
Martindale	22,000 Rubs			
Roll Length	Max size 50M / 45 yard rolls (sold by linear metre / yard)			
Weight	450 g/m2			
Minimum order	inimum order 1M / 3 Yards			
Fabric	Weekly light vacuuming is desirable to remove dirt and dust particles			
Maintenance	and greatly extends the life of the fabric. Most of our prints have			
	good resistance to being dry-cleaned in Perchloroethylene, but a spot			
	test is recommended to ascertain temperature and purity values			
	beforehand. Custom print on performance polyester for a more			
	washable product.			
FR Rating	All printed linens are supplied untreated and untested.			
	Fabrics made of at least 75% natural fibres can be Cigarette tested			
	upon request to comply with Domestic Upholstery regulations when			
	covered with a barrier cloth (schedule 3 interliner)			
Commodity Code	5309111000			
Country of Origin	UK			

Inquire for custom projects No minimum order on standard wallpaper, vinyl, linen, cotton or Trevira. **Custom lead time** 2-3 weeks sampling, 4-8 weeks production from receipt of 50% deposit. **Inquire for contract projects** 40 Metre minimums for Performance Polyester FR, 100 Metre minimums for ASTM Vinyl.

Contract lead time 6-8 weeks sampling, 8-10 weeks production from receipt of 50% deposit and confirmed order.

Christopher Farr | cloth

Ripple Technical Sheet

Custom Submittal Form


We thrive on creative conversations and love to be challenged, this combined with our intimate knowledge of colour, printing and weaving allows us to tackle almost any customisation project. With simple instruction on colour we can adapt the palette of a design to match any interior scheme.

Colours

We can easily alter the colours of our prints to adapt them for a particular scheme. We require guidance on colour from any source, such as fabric cutting, pantone or paint swatch references.

Base Qualities

We can alter the composition of our fabrics to make them more suitable for a given use. Whether we are printing onto a more durable ground for upholstery, Trevira or vinyl for flame retardancy, polyester for outdoor use, we apply the same care and attention.

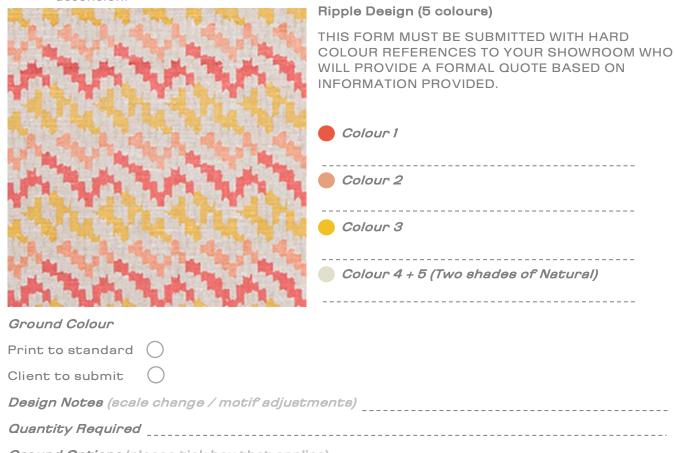

Ground Options (please tick box that applies)

Non-Woven Wallpaper (White or Ivory)		Raffia Wallpaper (50 M/YD Minimums apply)
Vinyl Wallpaper (Flat or Linen		Cotton (several options available)
Emboss)		
Trevira Polyester FR (several options		Outdoor Performance Polyester FR
available)		(40 M/YD Minimums apply)
Light Linen (Ecru or Natural)		Other - please specify:
Heavy Linen (Ecru or Natural)		

Custom print on contract vinyl to meet EN 13501 B-s2, d0 + ASTM E84 Class A standards. Custom print on Performance Polyester FR to meet class 1 anti-flame according to UNI 9176, B1 in Germany and M1 in France, NFPA 701-10, NFPA 260 and UFAC in Class 1.