
# Christopher Farr | cloth

## Ozone Performance Technical Sheet

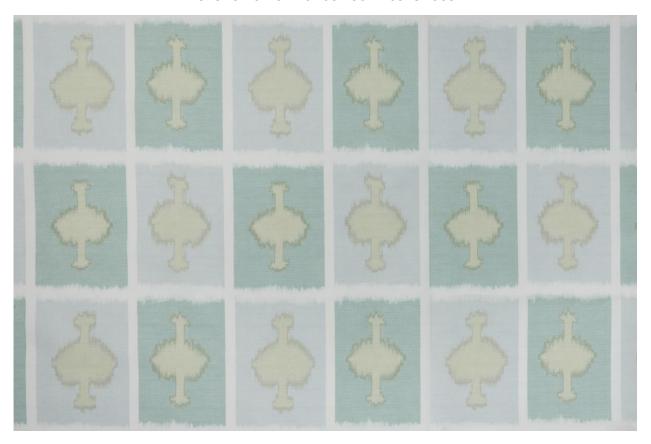

Ozone Celeste, Design by Kit Kemp

Composition	omposition 100% Polyester FR		
Width	52.8" / 134CM		
Pattern Repeat	Horizontal Repeat 13.2" / 33.5CM Vertical Repeat 19.3" / 49.1CM		
Martindale	40,000 Rubs		
Roll Length	Max size 40M / 43 yard rolls (sold by linear metre / yard)		
Weight	250 g/m2		
Minimum order	1M / 3 Yards		
Maintenance	Machine washable at 30 degrees. Do not twist or wring. Do not		
	steam iron. Iron on reverse only.		
	$ ag{2} \boxtimes \boxtimes \boxtimes $		
Finishing	Soil-resistant, mould resistant and water-resistant.		
	PFAS-Free.		
UK FR Classification	BS5852:1979 Part 1 Pass, BS EN 1021-1-2:2006 Pass		
USA FR Classification	NFPA 701-10 Pass, NFPA 260 Pass, CAL 117 Pass		
Europe FR Classification	EN 13773 Class 1		
French FR Classification	ch FR Classification NF P 92-503 504 505 (MI)		
Italian FR Classification	UNI 9177 Classe Uno		
Country of Origin	Italy		
Commodity Code	55121910		

Inquire for custom projects No minimum order on standard wallpaper, vinyl, linen, cotton or Trevira. Custom lead time 2-3 weeks sampling, 4-8 weeks production from receipt of 50% deposit. Inquire for contract projects 40 Metre minimums for Performance Polyester FR. Contract lead time 6-8 weeks sampling, 8-10 weeks production from receipt of 50% deposit and confirmed order.

# Christopher Farr | cloth

#### Ozone Performance Technical Sheet

### **Custom Submittal Form**


We thrive on creative conversations and love to be challenged, this combined with our intimate knowledge of colour, printing and weaving allows us to tackle almost any customisation project. With simple instruction on colour we can adapt the palette of a design to match any interior scheme.

#### Colours

We can easily alter the colours of our prints to adapt them for a particular scheme. We require guidance on colour from any source, such as fabric cutting, pantone or paint swatch references.

#### Base Qualities

We can alter the composition of our fabrics to make them more suitable for a given use. Whether we are printing onto a more durable ground for upholstery, Trevira or vinyl for flame retardancy, polyester for outdoor use, we apply the same care and attention.

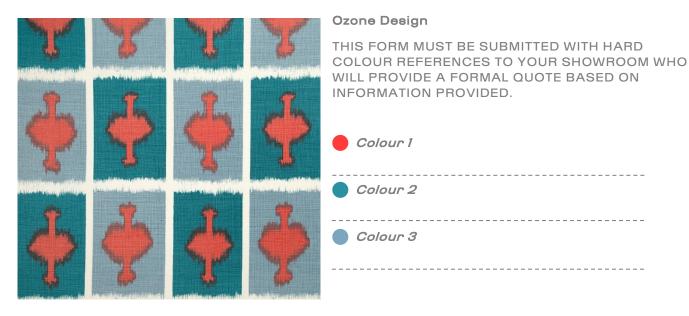

# Ground Colour Print to standard Client to submit Design Notes (scale change / motif adjustments) Quantity Required

#### Ground Options (please tick box that applies)

Non-Woven Wallpaper (White or Ivory)	Raffia Wallpaper (50 M/YD Minimums apply)
Vinyl Wallpaper (Flat or Linen Emboss)	Cotton (several options available)
Trevira Polyester FR (several options available)	Outdoor Performance Polyester FR (40 M/YD Minimums apply)
Light Linen (Ecru or Natural)	Other - please specify:
Heavy Linen (Ecru or Natural)	

Custom print on contract vinyl to meet EN 13501 B-s2, d0 + ASTM E84 Class A standards. Custom print on Performance Polyester FR to meet class 1 anti-flame according to UNI 9176, B1 in Germany and M1 in France, NFPA 701-10, NFPA 260 and CAL 117.